

1U FIBRE OPTIC ST PATCHPANEL



This innovative and robust 1U sliding patch panel has been designed to accept up to 24 fibres housed within a 1U space.

With the ability to use a full array of Adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional panel which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the array of adaptors the panel also offers multiple cable entry solutions, up to 4 standard cable entry points for, loose tube, tight buffer, pre terminated and steel tape armoured cable.

Each panel has an integrated strength member tie position and additional removable plate at the rear of the panel to allow the installation of steel tape armoured cable.

Features:

- Up to 24 fibre in 1U
- Multiple Adaptor option available
- 24 Adaptor position
- Individually labelled ports
- 45° open working angle
- Accepts loose tube, distribution and pre terminated cable RoHS, REACH SvHC and UL rated
- Fits standard 19"

Applications:

- Data centre, premise installation, telecommunication networks
- Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- Data communication
- Indoor Applications

Specification:

U Size	1U (44,4mm)	Material	Cold-Rolled Steel
Width	482mm	Material thickness	1.2mm
Depth	205mm	Material coating	Powder Coating
Net weight	2,5Kg	Colour	RAL 9004
Packaged weight	3kgs	Operating temperature	-40C to + 50C
Packaged dimensions	530mm (W) x 55mm (H) x 260mm (D)	Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754,EN297-1
IP rating	IP20	Compliant to	RoHS, Reach/SVHC
Suitable for Adaptor type	ST/FC		
Number of port	24		
Cable Entry 20mm	2		
Cable entry 25mm	2		
Mounting Adjustment range	50mm		

- For further information please contact one of our sales advisors
- WrenUk reserves the right to make changes to product specifications in the datasheet(s) at any time without notice.
- Information in this document is correct as of March 8, 2016

Europe Sales Office(s)
 E: info@wren.com
 T: +44 (0) 1908 951000
 T: +44 (0) 1373 858466




1U FIBRE OPTIC PATCHPANEL

Specification:

U Size	1U (44,4mm)
Width	482mm
Depth	205mm
Net weight	2,5Kg
Packaged weight	3kgs
Packaged dimensions	530mm (W) x 55mm (H) x 260mm (D)
IP rating	IP20
Suitable for Adaptor type	ST/FC
Number of port	24
Cable Entry 20mm	2
Cable entry 25mm	2
Mounting Adjustment range	50mm
Material	Cold-Rolled Steel
Material thickness	1.2mm
Material coating	Powder Coating
Colour	RAL 9004
Operating temperature	-40C to + 50C
Designed in accordance with	TIA/EIA 568.C, ISOO/IEC 11801, EN50173, IEC60304, IEC61754,EN297-1
Compliant to	RoHS, Reach/SVHC

Technical Drawing:

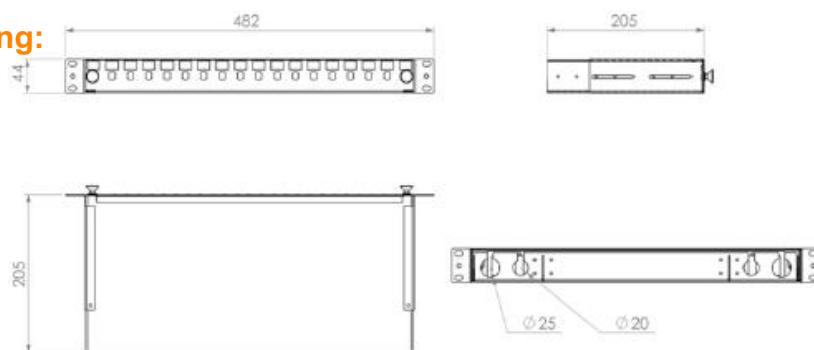

Part Numbers:

PANEL SLIDING	ADAPTOR	MM / SM	FIBRE COUNT CAPACITY
PS	E2	MM	24
PS	E2	SM	24
PS	E2A	SM	24
PS	LC	MM	48
PS	LC	SM	48
PS	LCA	SM	48
PS	FC	MM	24
PS	FC	SM	24
PS	FCA	SM	24
PS	SC	MM	48
PS	SC	SM	48
PS	SCA	SM	48
PS	ST	MM	24
PS	ST	SM	24

